

DS-QAE0215G1-V
Analog Ceiling Speaker 15W



- 5-inch coaxial tweeter
- Rated Power: 10/15 W
- Sensitivity(1 m, 1 W): 93 dB
- Max. SPL: 106 dB
- Frequency Response: 70 Hz to 18 kHz
- White


▪ Specification

Speaker	
Impedance	8 Ω
Speaker Unit	5" $\times$ 1
Rated Power	15W
Sensitivity(1 m, 1 W)	93 dB $\pm$ 3 dB
Maximum Sound Pressure Level	106dB
Frequency Response	70Hz to 18KHz
Interface	
Audio In	Rated voltage , 100 V
General	
Material	Shell: ABS; Mesh enclosure: iron mesh
Dimension	$\varnothing$ 186 $\times$ 80 mm($\varnothing$ 7.32" $\times$ 3.15")
Package Dimension	204x203x90mm(8.03" $\times$ 7.99" $\times$ 3.54")
Weight	Approx. 803 g (1.77 lb.)
With Package Weight	Approx. 980 g (2.16lb.)
Packing List	Device $\times$ 1 Quick Start Guidex1
Operating Temperature	'-20 $^{\circ}$ C~50 $^{\circ}$ C (-4 $^{\circ}$ F to 122 $^{\circ}$ F)
Operating Humidity	< 95%
Mounting Hole Dimension	$\varnothing$ 163mm($\varnothing$ 6.41")

▪ Available Model

DS-QAE0215G1-V

▪ Dimension

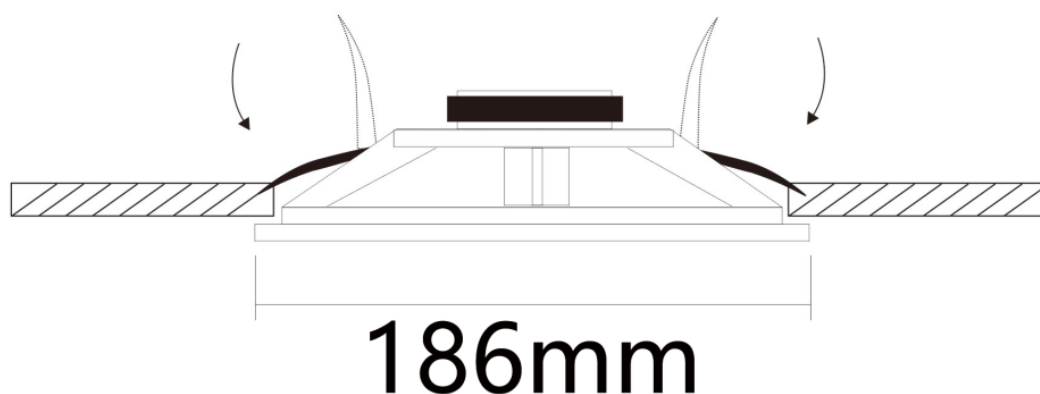

See Far, Go Further



www.hikvision.com
support@hikvision.com



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION[®]